

SUBSTITUTE FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

 ATTORNEY'S DOCKET NUMBER
11871-004001

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)

09/869679

 INTERNATIONAL APPLICATION NO.
PCT/US00/16361

 INTERNATIONAL FILING DATE
14 June 2000

 PRIORITY DATE CLAIMED
14 June 2000

 TITLE OF INVENTION
DISTRIBUTED LABEL SWITCHING ROUTER

 APPLICANT(S) FOR DO/EO/US
Geoffery A. Mattson, Loa Andersson

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other documents or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

☒ Notification of transmittal of the International Search Report or the Declaration.

☐
☐
☐
☐

CERTIFICATE OF MAILING BY EXPRESS MAIL


Express Mail Label No EL694850552US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231

 July 3, 2001
Date of Deposit

Signature

 Samantha Bell
Typed Name of Person Signing

U.S. APPLICATION NO. (IF KNOWN) 09/869679		INTERNATIONAL APPLICATION NO. PCT/US00/16361		ATTORNEY'S DOCKET NUMBER 11871-004001	
17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1000 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100 <div style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY	
Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	21 - 20 =	1	x \$18	\$18.00	
Independent Claims	- 3 =		x \$80	\$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$878.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$878.00	
Processing fee of \$130 for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
TOTAL NATIONAL FEE =				\$878.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$0.00	
TOTAL FEES ENCLOSED =				\$878.00	
				Amount to be refunded:	\$
				Charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$878.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Faustino A. Lichauco FISH & RICHARDSON P.C. 225 Franklin Street Boston, MA 02110-2804 (617) 542-5070 phone (617) 542-8906 facsimile			<div style="text-align: center;">  SIGNATURE: </div> <div style="text-align: center;"> NAME Faustino A. Lichauco </div> <div style="text-align: center;"> REGISTRATION NUMBER 41,942 </div>		

3/4215

09/869679

JC18 Rec'd PCT/PTO 03 JUL 2001

Attorney Docket No. 11871-004WO1

DISTRIBUTED LABEL SWITCHING ROUTER

FIELD OF INVENTION

This application relates to data communication networks, and in particular, to interfaces between MPLS networks and non-MPLS networks.

5 BACKGROUND

A network typically includes a collection of routers interconnected with each other. From a data packet's point of view, each router is a stepping stone toward its destination. To traverse the network from its source to its destination, a data packet engages in a sequence of "hops" from one router to the next.

- 10 Each router in a network is a device having an input side with at least one input connected to an adjacent router and an output side with several outputs, each of which is connected to an adjacent router. The router receives a data packet through its input and forwards the data packet to an adjacent router through one of its several outputs. The function of a router is to decide, for each
- 15 data packet arriving at its input, which of the several adjacent routers it is to relay the data packet to. Typically, a router accomplishes this by examining a header associated with the data packet to determine that data packet's destination. Using a look-up table, the router then determines which of the adjacent routers on its output side is the appropriate router for the data packet's next hop toward its
- 20 destination.

- In order for a network to operate correctly, it is preferable that each router understand the information contained in the header associated with the data packet. This can create difficulties when, in order to reach its destination, the data packet traverses a network in which the routers are unable to recognize the
- 25 information contained within the header. This can occur when a router understands only a protocol other than that used to generate the header.

An MPLS ("multi-protocol label switching") network is based on the

recognition that information for relaying the data packet on its next hop need be understood only by two adjacent routers. In an MPLS network, each data packet is encapsulated by a label. Each router on an MPLS network operates by receiving the labeled data packet through its input side and determining, on the basis of information in the label, which router to relay the data packet to on its output side. Then, the router switches the label with a new label containing information that can be understood by the next router to receive the data packet. The label is thus of only local significance and is typically switched to a new label before every hop. Because a router on an MPLS network switches the label associated with the data packet, such a router is referred to as a "label-switching router" or "LSR."

It is apparent that the LSRs in an MPLS network need not recognize or understand the header of the data packet. The LSRs need only recognize labels. As a result, a data packet can readily traverse networks in which the routers are incapable of recognizing its header. All that is necessary is that each router in the network be a label switching router. It is for this reason that an MPLS network is a "multi-protocol" network.

SUMMARY

A distributed LSR according to the invention includes an ingress gateway logically positioned between a first edge LSR and the non-MPLS network. This ingress gateway receives a label request from the first edge LSR and instructs a multicast agent to relay this label request from the ingress gateway, across a non-MPLS network, to a plurality of egress gateways. The multicast agent also relays responses, if any, from the egress gateways, across the non-MPLS network, and back to the ingress gateway. Preferably, the multicast agent maintains at least one table specifying the egress gateways corresponding to a particular virtual private network.

Among the egress gateways is a designated gateway, which is typically selected from the egress gateways on the basis of whether a connection can be made between that egress gateway and an address specified in the label request message. The designated gateway is logically positioned between the second
5 edge LSR and the non-MPLS network.

The non-MPLS network can be a conventional packet switching network such as an IP network. In this case, the distributed LSR preferably includes an ingress IP router logically positioned between the ingress gateway and the multicast agent and an egress IP router logically positioned between the egress
10 gateway and the IP network.

To avoid having the ingress gateway wait interminably for a response from the egress gateways, the ingress gateway preferably includes a timer for detecting the lapse of a predetermined interval following transmission of the label request.

15 Preferably, the distributed LSR also includes confirmation means for sending a confirmation message to the egress gateways. This confirmation message specifies the designated gateway for the communication path. The confirmation message can be sent to all egress gateways responding to the label request message or only to those egress gateways that are not to become the
20 designated gateway.

For some VPN topologies, the destination requested in a label request message may be accessible by more than output edge router. Under these circumstances, there exists the possibility that more than one egress gateway will send a label mapping message back to the ingress gateway. To address this
25 possibility, the distributed LSR preferably includes selection means for selecting a designated gateway from a plurality of responses from the plurality of egress gateways. This selection can be made on a first-come-first-served basis, in which

case the designated gateway is the first egress gateway to respond, or by determining which of the responding egress gateways is the optimal egress gateway.

According to an additional aspect of the invention, the distributed LSR
5 receives a label request from a first edge LSR and multicasts that label request across the non-MPLS network to a plurality of egress gateways. At least one egress gateway then generates a response indicating that there exists a communication path between a second edge LSR and that responding egress gateway. Upon receipt of this response, the ingress gateway then designates the
10 responding egress gateway to be the designated gateway for transmission of data to the second edge LSR.

Where the first and second LSRs are associated with VPNs, it is advantageous to maintain a secure link across the non-MPLS network. For this reason, it is preferable that a tunnel be established across the non-MPLS network
15 between the ingress gateway and the designated gateway.

Preferably, the ingress gateway waits only a predetermined interval for responses before assuming that communication is not currently available. This ensures that the ingress gateway will not wait an interminable period for a response.

20 Following designation of a designated gateway, the ingress gateway preferably sends a confirmation message to the egress gateways. This confirmation message can be sent to all egress gateways or all egress gateways other than the designated gateway.

The invention thus provides a method and system for interfacing a non-
25 MPLS network with an MPLS network in a gradual and controlled manner without the need to replace each router in the non-MPLS network with an LSR. This is accomplished by having the entire non-MPLS network appear to the

MPLS network as a single, virtual, LSR. This is a significant advantage because the conversion of a potentially large number of routers in a non-MPLS network requires a period during which the network will be non-operational.

5 The single, virtual LSR of the invention is a distributed LSR because it performs the functions of a conventional LSR through the cooperation of several routers. Like a conventional LSR, the distributed LSR accepts a labeled data packet at its input port, switches the label on the data packet, and sends the data packet, with its new label, out a selected output port. However, unlike a conventional LSR, the distributed LSR of the invention does not rely on a label
10 information base to accomplish label switching. Instead, an ingress gateway in the distributed LSR instructs a multicasting agent to multicast a label request, across a non-MPLS network, to each of a plurality of egress gateways. If a route to a destination from a particular egress gateway is available, that egress gateway then sends a label mapping message back to the ingress gateway.

15 On the basis of the label mapping messages received from the egress routers, the ingress router selects one of the egress routers to complete the LSP (label-switching protocol). The distributed LSR then creates a tunnel within the non-MPLS network for communication between the ingress router and the egress router.

20 Other features and advantages of the invention will be apparent upon examination of the following detailed description and the accompanying figures in which:

DESCRIPTION OF THE FIGURES

FIG. 1 is a schematic diagram of the architecture of a distributed LSR according to the invention;

FIG. 2 is the distributed LSR of FIG. 1 but with two output edge LSRs communicating with the same output MPLS network; and

FIG. 3 is a flow chart of the process carried out by the distributed LSR of FIG. 1.

DETAILED DESCRIPTION

Referring to FIG. 1, a distributed label-switching router (LSR) 10 interfaces a non-MPLS network 12 with both an input MPLS network 14 and with a plurality of output MPLS networks 16. In the illustrated embodiment, the input MPLS network 14 and the plurality of output MPLS networks 16 form two parts of a virtual private network (VPN). In the context of this description, the non-MPLS network is an IP network 12, however other packet switching networks can be substituted for the IP network 12.

The IP network 12 is a public network that links these two parts of the VPN. To maintain security of the VPN, data preferably travels along a secure path when traversing the IP network 12. This is achieved by establishing a tunnel across the IP network 12. The distributed LSR 10 dynamically establishes such tunnels on an as-needed basis.

The input MPLS network 14 connects to the distributed LSR 10 through an input edge LSR 18. Similarly, the output MPLS networks 16 connect to the distributed LSR 10 through a plurality of output edge LSRs 20. Both the input edge LSR 18 and the output edge LSRs 20 are MPLS egress routers running LDP and operating in downstream on-demand mode with conservative label retention. Both the input edge LSR 18 and the output edge LSRs 20 perform the ingress and egress functions specified by the conventional MPLS architecture. Preferably, the

distributed LSR 10 uses MPLS signaling rather than conventional frame relay signaling to minimize the extent of the routing information exchanged between ingress router and the egress router. This results in a simpler and more scalable network. Each edge LSR shown in FIG. 1 communicates with the distributed
5 LSR 10 through a frame-relay interface. However, the edge LSRs can also communication with the distributed LSR through other WAN interfaces.

The distributed LSR 10 interfaces with the input MPLS network 14 through an ingress router 22 connected to the input edge LSR 18. An ingress gateway 24 logically positioned between the input edge LSR 18 and a first IP
10 router 26 provides the interface between the ingress router 22 and the input edge LSR 18. Through a multicast agent 28, the ingress router 22 interfaces with the IP network 12 that provides communication paths between the ingress router 22 and a plurality of egress routers 30.

For purposes of illustration, FIG. 1 shows a first egress router 32 in
15 communication with a first output network 34 through a first output edge LSR 36. Similarly, FIG. 1 shows second and third egress routers 38, 40 in communication with second and third output networks 42, 44 through second and third output edge LSRs 46, 48 respectively. However, the plurality of egress routers 30 can include any number of constituent egress routers.

20 The structures of the egress routers 32, 38, 40 mirror that of the ingress router 22. For example, the first egress router 32 includes a first egress gateway 50 logically positioned between a second IP router 52 and the first output edge LSR 36. The first egress gateway 50 interfaces with the first output edge LSR 36 while the second IP router 52 interfaces with the IP Network 12. Similarly, the
25 second and third egress routers 38, 40 include second and third egress gateways 54, 56 logically positioned between the third and fourth IP routers 58, 60 and the second and third output edge LSRs 46, 48 respectively. The second and third egress routers 38, 40 interface with the IP network 12 through the third and fourth

IP routers **58, 60** respectively and with the second and third output edge LSRs **46, 48** through the second and third egress gateways **54, 56** respectively.

In operation, the input edge LSR **18** and the ingress gateway **24** establish an LDP (label distribution protocol) session between each other using
5 conventional discovery and initialization procedures. This is equivalent to setting up an LDP session between two LSRs in conventional MPLS networking. Little or no routing information is exchanged between the ingress gateway **24** and the input edge LSR **18** during establishment of an LDP session. It is sufficient that
10 the input edge LSR **18** use the ingress gateway **24** as a default router or default next hop for addresses within the VPN. This implies that to resolve an address within the VPN, the input edge LSR **18** sends the ingress gateway **24** a label request message specifying a destination address.

In response to a label request message from the input edge LSR **18**, the ingress gateway **24** communicates the label request message to the multicast
15 agent **28**. For each VPN serviced by the distributed LSR **10**, the multicast agent **28** maintains a router table **62** listing all egress routers associated with that VPN. As a result, changes to the topology of a particular VPN are easily implemented by adding and deleting egress routers from the appropriate router table **62**.

The multicast agent **28** relays the label request to the all the egress routers
20 in its router table **62**, which in the example of FIG. 1 includes the first, second, and third egress routers **32, 28, 40**. The first, second, and third egress routers **32, 28, 40** then forward the label request to the first, second, and third output edge LSRs **36, 46, 48**, each of which has established an LDP session with its corresponding egress gateway **50, 54, 56**. Each of the output edge LSRs **36, 46,**
25 **48** includes a routing table listing all destinations accessible by that edge LSR.

Each of the first, second, and third output edge LSRs **36, 46, 48** determines, independently of the others, whether the destination address specified

in the label request message is within its respective routing table. If one of the output edge LSRs, for example the first output edge LSR 36, determines that the destination address is in its routing table, it sends a label mapping message back to the first egress gateway 50 to which it is connected. The first egress gateway
5 50 then forwards the label mapping message across the IP network 12 to the ingress gateway 24.

Upon receipt of a label mapping message, the ingress gateway 24 designates the responding egress gateway (in this case the first egress gateway 50) to be the designated gateway for the ensuing label switched path (LSP)
10 between the ingress gateway 24 and the responding output edge LSR 36. The first egress gateway 50, which is now the designated gateway, then establishes a tunnel across the IP network 12 between itself and the ingress gateway 24. This establishes an LSP path between the input edge LSR 18 and the first output edge LSR 36. The resulting LSP path includes three distinct path segments: (1) a
15 segment from the input edge LSR 18 to the ingress gateway 24, which is labeled in normal MPLS fashion; (2) a segment from the ingress gateway 24 to the first egress gateway 50, in which traffic is carried in an IP tunnel; and (3) a segment from the first egress gateway 50 to the first output edge LSR 36, which is labeled in normal MPLS fashion.

20 In a preferred embodiment, upon receipt of a label mapping message from any one of the egress gateways 50, 54, 56, the ingress gateway 24 instructs the multicast agent 28 to relay to all the egress gateways 50, 54, 56 a confirmation message containing the identity of the designated gateway. Each egress gateway 50, 54, 56 checks the identity of the designated gateway specified in this
25 confirmation message. If the identity of the designated gateway differs from that of the egress gateway, the egress gateway releases the LSP at its interface with its corresponding output edge LSR. If the output edge LSR connected to the egress gateway has already responded, this is achieved by sending a label abort notification message to the output edge LSR.

Alternatively, the ingress gateway 24 can instruct the multicast agent 28 to send a message only to those egress gateways that are not the designated gateway. This message instructs those egress gateways to abort any LSP established in response to the original label request message.

5 Preferably, the ingress gateway 24 includes a timer 64 that begins counting down upon transmission of the label request message. If, at the expiration of a predetermined interval the ingress gateway 24 fails to receive any response from the egress gateways 50, 54, 56, the ingress gateway 24 sets the address of the designated gateway to be a null address and sends a confirmation
10 message, as described above.

For some VPN topologies, as shown in FIG. 2, a particular destination address may be in two different router tables associated with two different output edge routers. Under these circumstances, the ingress gateway 24 may receive two label mapping messages. Although a VPN topology of the type shown in FIG. 2
15 is both uncommon and undesirable, it is preferable that the ingress gateway 24 be provided with a mechanism for designating an egress gateway for the LDP session from a plurality of responding egress gateways. This choice can be made randomly, for example on a first-come-first-served basis. Alternatively, the choice can be made on the basis of which egress gateway is perceived to be
20 optimal. For example, if one of the two responding egress gateways is notoriously busy, the designated egress gateway might be the less busy egress gateway.

Referring now to FIG. 3, the process of establishing a communication path between the input edge LSR and the output edge LSR begins with the
25 receipt 66, by the ingress gateway, of a label request message from the input edge LSR. The ingress gateway then instructs 68 the multicast agent to multicast the label request message across the IP network to the egress gateways. Concurrently, the input edge LSR sets 70 a timer and waits 72 for a response.

Periodically, the ingress gateway checks **74** the timer to see if a waiting interval has elapsed. If the waiting interval has not yet elapsed, the ingress gateway continues **72** to wait for a response. If the waiting interval has elapsed and no response has been received from an egress gateway, the ingress gateway
5 sets **76** the designated gateway to be a null gateway. A confirmation message specifying this designated gateway is then multicast **80** to the egress gateways.

Meanwhile, each egress gateway receives **82** the multicast label request message and establishes **84** an LDP session with output edge router to determine whether the destination specified in that message is accessible to it. If it is not, the
10 egress gateway does nothing **86**. If it is, then the egress gateway sends **88** a label mapping message back to the ingress gateway.

Upon receipt **90** of the label mapping message, the ingress gateway sets **92** the egress gateway that sent the label mapping message to be the designated gateway. A confirmation message specifying the designated gateway is then
15 multicast **80** to the egress gateways.

In those rare cases in which the ingress gateway receives a label mapping message from more than one egress gateway, the ingress gateway selects a designated gateway, either on a first-come-first-served basis or by selecting the optimal egress gateway to be the designated gateway.

20 Each egress gateway then receives **94** the confirmation message and determines **96** whether it is to become the designated gateway. If the egress gateway determines that it is to become the designated gateway, it proceeds to establish **98** a tunnel across the IP network between itself and the ingress gateway. If the egress gateway determines that it is not to become the designated
25 gateway, it proceeds to tear down **100** the LDP session, if any, established between itself and an output edge router.

It is apparent from the foregoing that the when ingress and egress

Attorney Docket No. 11871-004WO1

gateways cooperate with a multicasting agent in the manner set forth above.
encapsulates a non-MPLS network so that, from the point of view of an edge
LSR, it appears to be no more than another LSR. This is achieved without the
burden and expense of having to convert each router within the non-MPLS
5 network into an LSR. In addition, the distributed LSR dynamically establishes
tunnels through the non-MPLS network on an as-needed basis, thereby
simplifying the task of adding and removing customers from a VPN.

It is to be understood that while the foregoing detailed description has
described a selected embodiment of the invention, it is intended to illustrate and
10 not to limit the scope of the invention. The invention, together with other aspects,
advantages, and modifications thereof, are limited only by the scope of the
appended claims.

What is claimed is:

CLAIMS

1. A distributed label-switching-router for sending a data packet from a first edge label-switching-router, across a non-multi-protocol-label-switching network, to a second edge label-switching-router, said distributed label-switching-router comprising:
 - an ingress gateway logically positioned between said first edge label-switching-router and said non-multi-protocol-label-switching network, said ingress gateway receiving a label request from said first edge label-switching-router;
 - a multicast agent in communication with said ingress gateway and said non-multi-protocol-label-switching network for relaying said label request from said ingress gateway, across said non-multi-protocol-label-switching network, to a plurality of egress gateways, and for relaying at least one response from said plurality of egress gateways, across said non-multi-protocol-label-switching network, to said ingress gateway; and
 - a designated gateway from said plurality of egress gateways, said designated gateway being logically positioned between said second edge label-switching-router and said non-multi-protocol-label-switching network.
2. The distributed label-switching-router of claim 1 wherein said non-multi-protocol-label-switching network is an internet protocol network.
3. The distributed label-switching-router of claim 2 further comprising an ingress internet protocol router logically positioned between said ingress gateway and said multicast agent.
4. The distributed label-switching-router of claim 2 further comprising an

egress internet protocol router logically positioned between said egress gateway and said internet protocol network.

5. The distributed label-switching-router of claim 1 wherein said ingress gateway further comprises a timer for detecting the lapse of a predetermined interval following transmission of said label request.
6. The distributed label-switching-router of claim 1 wherein said multicast agent further comprises a table providing information indicative of which egress gateways from said plurality of egress gateways are associated with a virtual private network.
7. The distributed label-switching-router of claim 1 further comprising confirmation means for sending a confirmation message designating said designated gateway from said plurality of egress gateways.
8. The distributed label-switching-router of claim 7 wherein said confirmation means comprises means for sending said confirmation message to all egress gateways responding to said label request message.
9. The distributed label-switching-router of claim 7 wherein said confirmation means comprises means for sending said confirmation message to those egress gateways, other than said designated gateway, responding to said label request message.
10. The distributed label-switching-router of claim 1 further comprising selection means for selecting a designated gateway on the basis of said at least one response from said plurality of egress gateways.
11. The distributed label-switching-router of claim 1 further comprising selection means for selecting a designated gateway from a plurality of responses from said plurality of egress gateways.

12. The distributed label-switching-router of claim 1 wherein said designated gateway further comprises means for establishing a tunnel across said non-multi-protocol-label-switching network.
13. A method for sending a data packet from a first edge label-switching-router, across a non-multi-protocol-label-switching network, to a second edge label-switching-router, said method comprising:
- 5 receiving a label request from said first edge label-switching-router;
- 10 multicasting said label request, across said non-multi-protocol-label-switching network, to a plurality of egress gateways;
- receiving at least one response from at least one egress gateway from said plurality of egress gateways, said at least one response indicative of a communication path between said second edge label-switching-router and said at least one egress gateway; and
- 15 designating said at least one egress gateway to be a designated gateway for communication between said first edge label-switching-router and said second edge label-switching-router.
14. The method of claim 13 further comprising establishing a tunnel across said non-multi-protocol-label-switching network.
- 20 15. The method of claim 13 further comprising detecting a lapse of a predetermined interval following said multicasting of said label request.
16. The method of claim 13 further comprising determining which egress gateways from said plurality of egress gateways are associated with a virtual private network.
- 25

17. The method of claim 13 further comprising confirming said designated gateway by sending a confirmation message to said plurality of egress gateways, said confirmation message being indicative of said designated gateway from said plurality of egress gateways.
- 5 18. The method of claim 17 wherein confirming said designated gateway comprises sending said confirmation message to all egress gateways responding to said label request message.
19. The method of claim 17 wherein confirming said designated gateway comprises sending said confirmation message to those egress gateways,
10 other than said designated gateway, responding to said label request message.
20. The method of claim 13 further comprising selecting a designated router on the basis of said at least one response from said plurality of egress gateways.
- 15 21. The method of claim 13 further comprising selecting a designated router from a plurality of responses from said plurality of egress gateways.

ABSTRACT

A distributed LSR sends data from a first edge LSR, across a non-MPLS network, to a second edge LSR, thereby enabling a non-MPLS network to interface transparently with MPLS networks. This enables a VPN to use a public
5 network to communicate from one portion of the network to another, remote portion. The distributed LSR includes an ingress gateway logically positioned between the first edge LSR and the non-MPLS network. This ingress gateway receives label requests from the first edge LSR. These label requests are multicast to several egress gateways. At least one egress gateway sends a message back
10 indicating that it can transmit data to the destination. In response, the ingress gateway designates that egress gateway to be a designated gateway. The egress gateway then establishes a tunnel through the non-MPLS network to the ingress gateway.

15

20052199.doc

1/3

FIG. 1



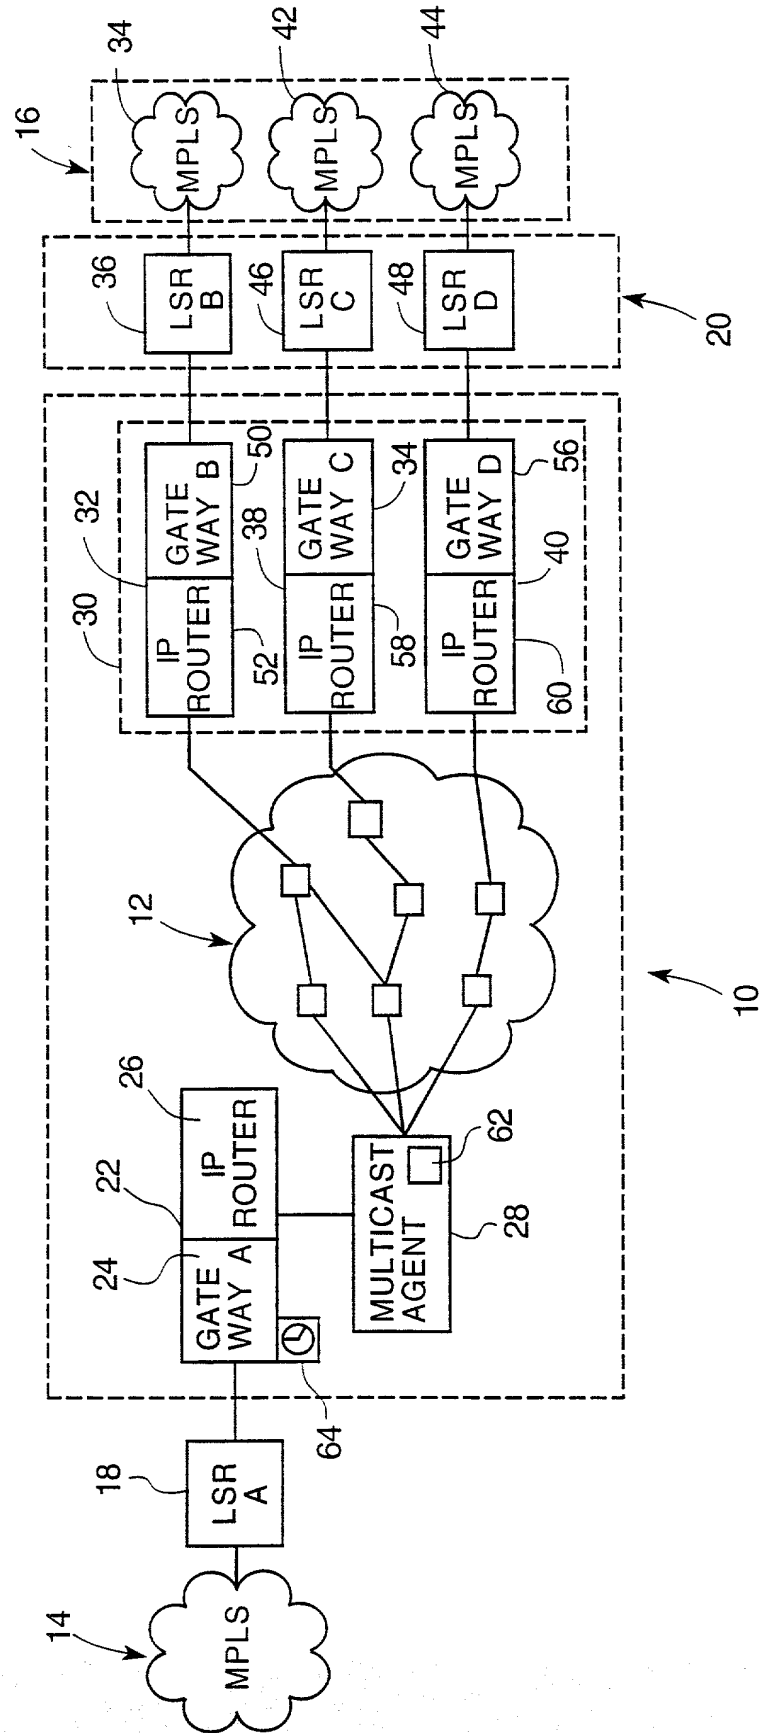


FIG. 2

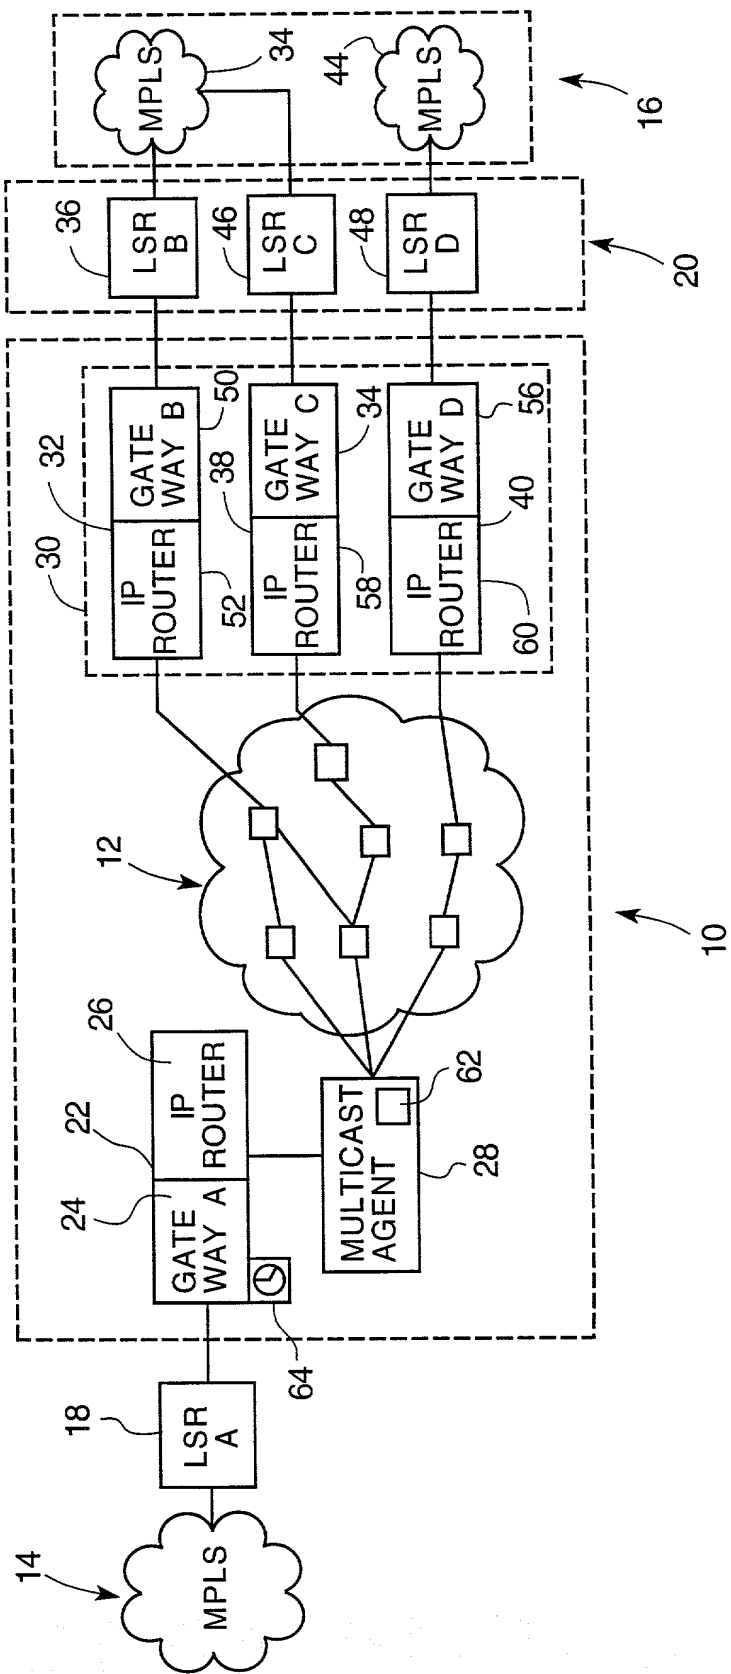

3/3

FIG. 3

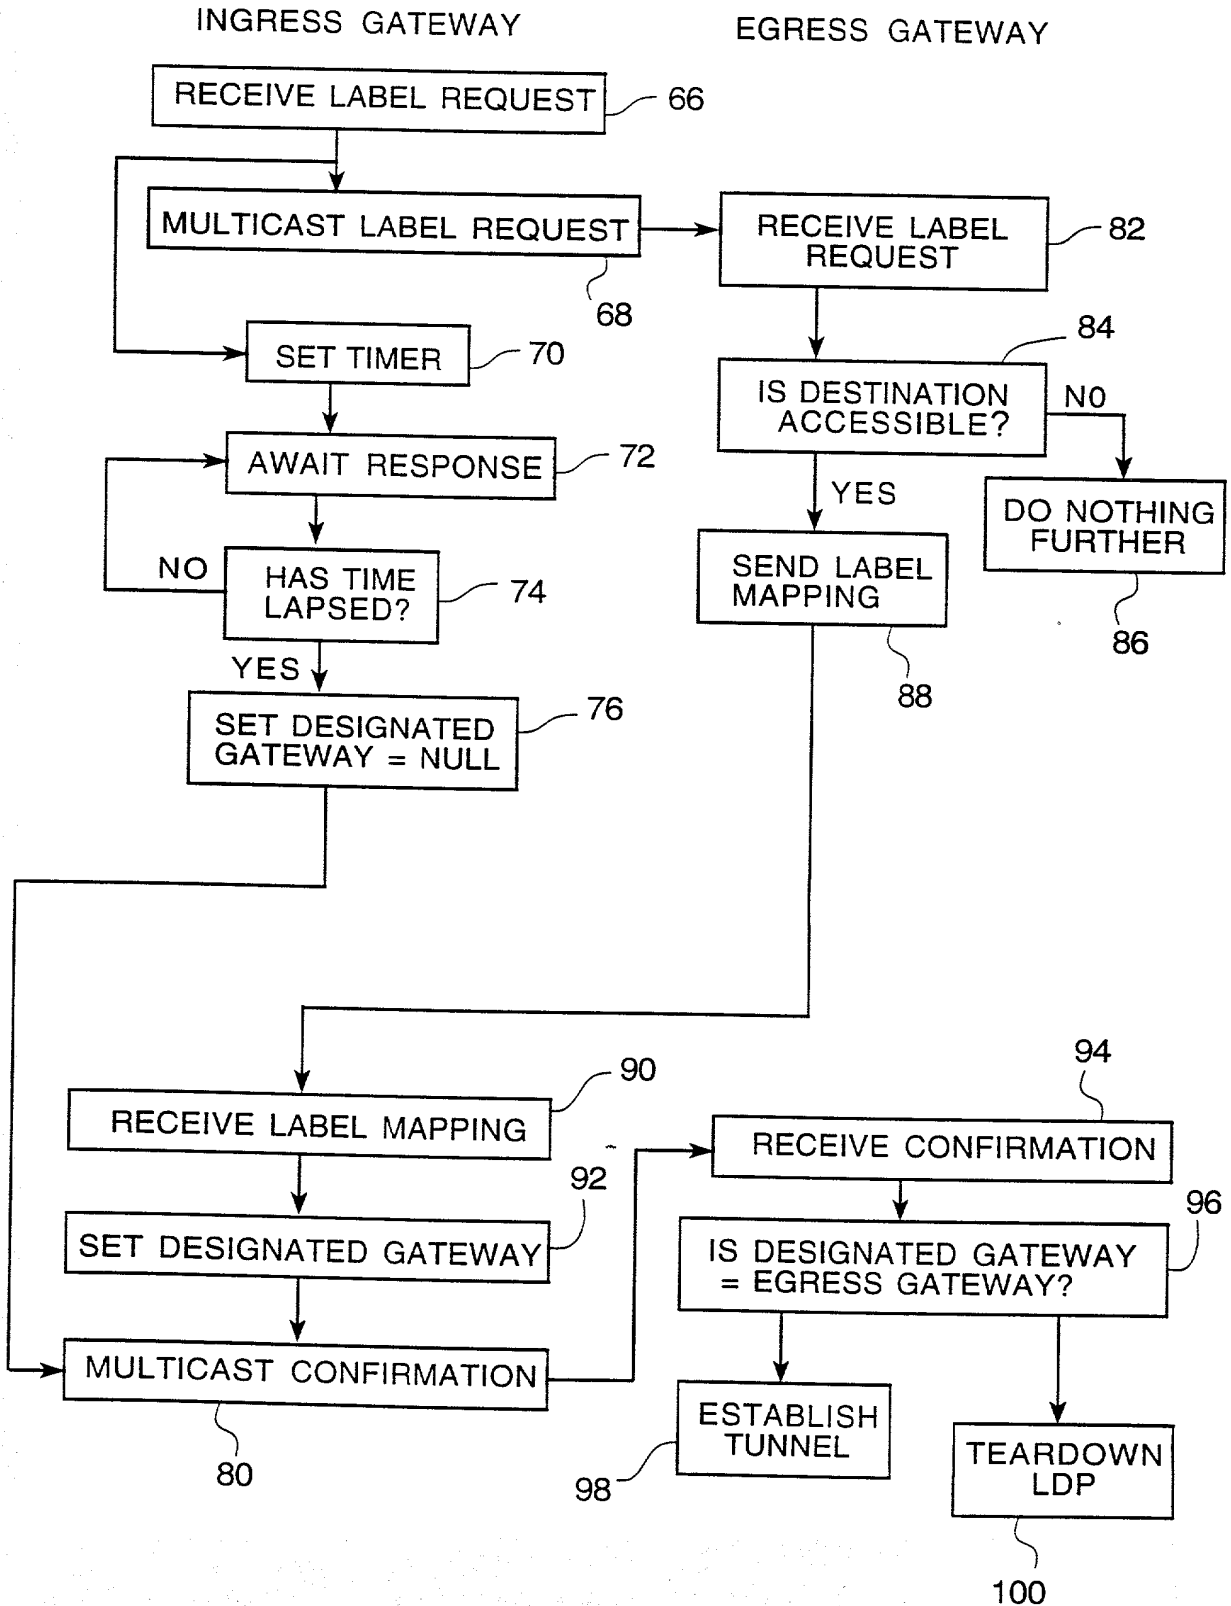

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DISTRIBUTED LABEL SWITCHING ROUTER, the specification of which:

- ☐ is attached hereto.
☒ was filed on July 3, 2001 as Application Serial No. 09/869,679 and was amended on _____
☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
PCT	US00/16361	June 14, 2000	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frank R. Occhiuti, Reg. No. 35,306
Denis G. Maloney, Reg. No. 29,670

Faustino A. Lichauco, Reg. No. 41,942
Frank P. Porcelli, Reg. No. 27,374

Address all telephone calls to DENIS G. MALONEY at telephone number (617) 542-5070.

Address all correspondence to DENIS G. MALONEY at:

FISH & RICHARDSON P.C.
225 Franklin Street
Boston, Massachusetts 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Combined Declaration and Power of Attorney

Page 2 of 2 Pages

Full Name of Inventor: LOA ANDERSSON

Inventor's Signature: 

Date: 31/10-01

Residence Address: Skovelagen 17, Jlvsko 12533, SWEDEN SEX

Citizenship: Sweden

Post Office Address: Skovelagen 17, Jlvsko 12533, SWEDEN

Full Name of Inventor: GEOFFREY A. MATTSON

Inventor's Signature: _____

Date: _____

Residence Address: 2 Rue Du Revely, Antibes, 99, France, 06600

Citizenship: USA

Post Office Address: 2 Rue Du Revely, Antibes, 99, France, 06600

20313797.doc

Attorney's Docket No.: 11871-004001

Client's Ref. No.: 11367FR

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DISTRIBUTED LABEL SWITCHING ROUTER, the specification of which:

☐ is attached hereto.

☒ was filed on July 3, 2001 as Application Serial No. 09/869,679 and was amended on _____.

☒ was described and claimed in PCT International Application No. PCT/US00/16361 filed on June 14, 2000 and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
PCT	US00/16361	June 14, 2000	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frank R. Occhiuti, Reg. No. 35,306
Denis G. Maloney, Reg. No. 29,670

Faustino A. Lichauco, Reg. No. 41,942
Frank P. Porcelli, Reg. No. 27,374

Address all telephone calls to DENIS G. MALONEY at telephone number (617) 542-5070.

Address all correspondence to DENIS G. MALONEY at:

FISH & RICHARDSON P.C.
225 Franklin Street
Boston, Massachusetts 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Attorney's Docket No.: 11871-004001

Client's Ref. No.: 11367FR

Combined Declaration and Power of Attorney

Page 2 of 2 Pages

Full Name of Inventor: LOA ANDERSSON


Inventor's Signature: _____

Date: _____

Residence Address: Skovelagen 17, Jlvsgo 12533, SWEDEN

Citizenship: Sweden

Post Office Address: Skovelagen 17, Jlvsgo 12533, SWEDEN

Full Name of Inventor: GEOFFREY A. MATTSONInventor's Signature: Date: 5/4/2002Residence Address: ~~2 Rue Du Revely, Antibes, 99, France, 06600~~

Citizenship: USA

Post Office Address: ~~2 Rue Du Revely, Antibes, 99, France, 06600~~

20313797.doc

38 Hawthorne Rd.

Hudson NH. NH USX

20050529-000100